

## A B E R D E E N PRODUCT SPECIFICATIONS

### Application

Upholstery

### Content

100% CPU Polyurethane - Clean Performance Urethane

### Backing

65% Polyester, 35% Cotton

### Width

54"

### Repeat

N/A

### Roll Length

App. 40yds

### General Characteristics

- Abrasion: 200,000+ Double Rubs (ASTM D4157 Wyzenbeek)
- Hydrolysis: 15+ weeks (ISO 1419)
- Colorfastness to Crocking: Grade 5 (AATCC 8)
- Colorfastness to Light: 200+ hours (AATCC-16)
- Tearing Strength (ASTM D2262)
- Adhesion of Coating (ASTM D751)
- Meets all ACT Heavy Duty Performance Guidelines

### Flammability


CA Bulletin 117-2013; UFAC/NFPA-260; IMO A652 (16) 8.2

### Cleaning


W/S, Bleach (10:1)

### Environmental

- Healthier Hospitals Compliant
- Solvent/DMF Free
- PVC/Phthalate Free
- No added FR/Anti-Bacterial

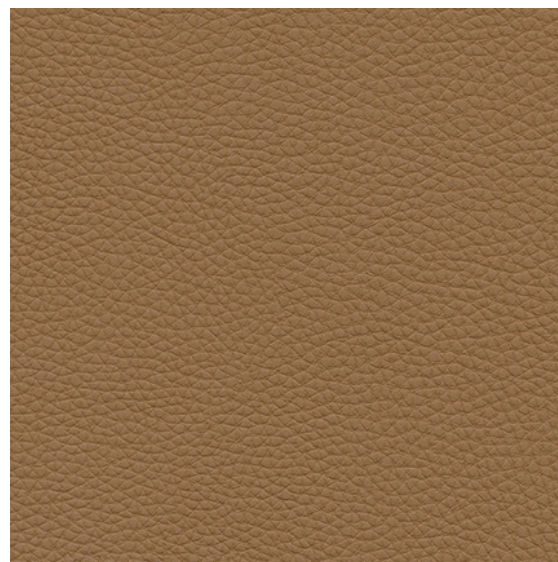

Field




Snow White



Eggshell



Chardonnay




Milkweed




Barley




Dune



Ginger




Dk. Chocolate




Rouge



Ocean



Espresso



Black

### Warranty

Please refer to our Terms of Sales for warranty information.

- Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.

Wyzenbeek results above 100,000 Double Rubs have not been shown to be a reliable indicator of increased fabric lifespan.



ACT® Registered Certification Marks