

GRANULAR PRODUCT SPECIFICATIONS

Application
Upholstery

Content
100% Phthalate Free Vinyl

Backing
65% Polyester, 35% Cotton

Width
54"

Repeat
4.75"H

General Characteristics

- Abrasion: 100,000+ Double Rubs (ASTM D4157 Wyzenbeek)
- Colorfastness to Crocking: Grade 5 (AATCC 8)
- Colorfastness to Light: 200+ hours (AATCC-16)
- Meets all ACT Heavy Duty Performance Guidelines

Flammability


CA Bulletin 117-2013; UFAC/NFPA-260; IMO A652 (16) 8.2

Cleaning

W, Bleach (10:1)

Environmental


- Phthalate Free
- No added FR/Anti-Bacterial

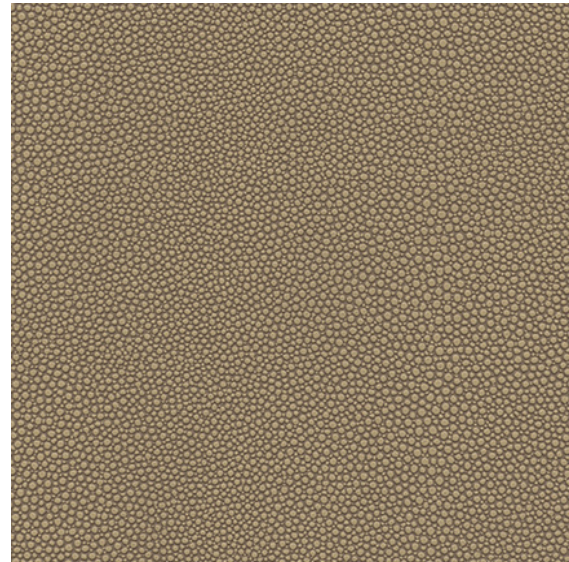


Parch




Fawn




Earth



Sand



Coffee



Moss




Sumatra



Ethiopia



Ridge



Copper



Abyss

Warranty

Please refer to our Terms of Sales for warranty information.

- Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.

Wyzenbeek results above 100,000 Double Rubs have not been shown to be a reliable indicator of increased fabric lifespan.



ACT® Registered Certification Marks