Concertex

VOLTAGE

PRODUCT SPECIFICATIONS

Application
Upholstery

Content
100% Polyurethane

Backing
100% Polyester

Finish
Graffiti-Free®

Width
54"

Repeat
App. 4.375" H, 3.375" V

Roll Length
App. 50yds

General Characteristics
- Abrasion: 100,000+ Double Rubs (ASTM D4157 Wyzenbeek)
- Hydrolysis: 10+ weeks (ISO 1419)
- Colorfastness to Crocking: Grade 5 (AATCC 8)
- Colorfastness to Light: 200+ hours (AATCC-16)
- Tearing Strength (ASTM D2262)
- Adhesion of Coating (ASTM D751)
- Meets all ACT Heavy Duty Performance Guidelines

Flammability
CA Bulletin 117-2013; UFAC/NFPA-260; IMO A652 (16) 8.2

Cleaning
W/S, Bleach (4:1)

Environmental
- Healthier Hospitals Compliant
- DMF-Free
- PVC/Phthalate Free
- No added FR/Anti-Bacterial

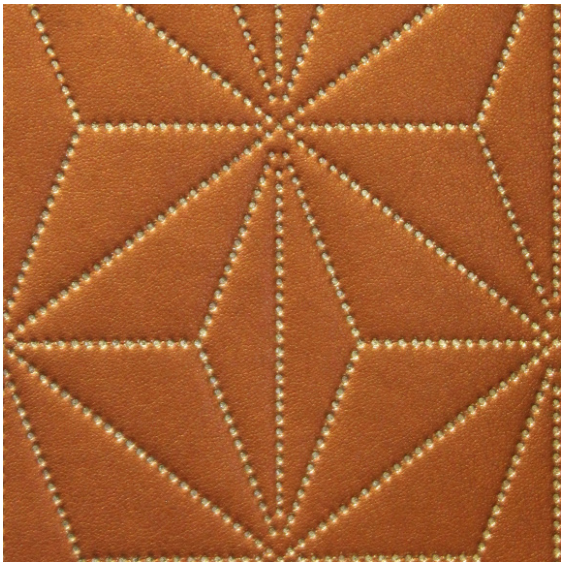
Citrine


Ebonite

Flint

Gunmetal

Gypsy

Ivory

Latte

Muddy Gold

Penny

Pewter

Turquoise

Warranty
Please refer to our Terms of Sales for warranty information.
- Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 Double Rubs have not been shown to be a reliable indicator of increased fabric lifespan.

ACT® Registered Certification Marks

Concertex, LLC 108 Fairway Court, Northvale, NJ 07647 T: 201.784.8370 F: 201.750.3460 E: info@concertex.com