

BRENTANO™

WWW.BRENTANOFABRICS.COM




©2017 BRENTANO, INC. PATTERN AND DESIGN

Fuse

1224 Fuse

Fuse is a highly tactile textile that is both restrained and chic. With an understated patination, this hugely versatile 54" wide cloth is not only suitable for indoor/outdoor upholstery but is also an excellent hydrophobic and acoustical panel fabric. Featuring 14 colorways ranging from quiet neutrals to energetic hues inspired by nature, Fuse has an abrasion resistance of 60,000 double rubs (Wyzenbeek, Wire Screen), passes CAL 117, ASTM E-84 Class A (unadhered) and is IMO Wheelmark certified. In addition, Fuse is bleach cleanable and bacterial resistant. It's not overstating the facts to say Fuse is truly a fabric that can do it all.

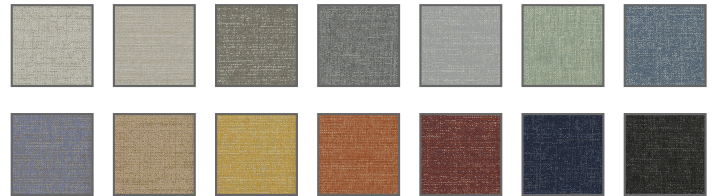

FABRIC INFORMATION

ACT Symbols:



Repeat:

Collection:

Framework Collection

Cleaning:

[Fabric Care](#) » W/S/B1:10
(Water/Solvent/Bleach)

Width:

54" [137 cm]

Usage:

Indoor / Outdoor Upholstery,
Acoustical Panel

Contents:

100% Solution-Dyed FR
Polypropylene

Weight:

[597 g/m.]

Finish:

Note:

ASTM C423: NRC of 1.05 when
wrapped with 2" panel. IMO
Wheelmark Certified. Bacterial
Resistant.

TECHNICAL SPECIFICATIONS

Wear Test:

60,000 Double Rubs (Wyzenbeek,
Wire Screen)

Pilling:

Class 4.5 (ASTM D3511)

Fire Resistance:

Passes California Bulletin 117: 2013,
ASTM E-84 Class A (Unadhered),

Crocking:

Dry: 4.5 Wet: 4.5 (AATCC 116-2018)

Breaking Strength:

Warp: 562 lb Fill: 351 lb ASTM D 5034

UFAC Class 1, NFPA 260 Class 1,
IMO 2010 FTP Code Part 8
Upholstery

Seam Slippage:

(Grab)

Warp: 137.4 lb Fill: 137.5 lb (ASTM
D4034)

IMO Wheelmark



Lightfastness:

600 Hours Class 4 (AATCC 16)